

E36L SERIES ELECTRIC RESTAURANT RANGES



Model E36L



SPECIFICATIONS:

36" wide electric restaurant range, Vulcan-Hart Model No. E36L. Stainless steel front, sides, back riser, plate shelf and 6" adjustable legs. Six 9½" round French plates, 2 KW input per plate. Full width pull out crumb tray located beneath the cooking top. Oven interior measures 26¼" w x 22½" d x 14½" h. One oven rack and two rack positions. 5 KW input. Top browning heat control. Thermostat adjusts from 150° to 500°F. Requires 208 volt, 240 volt, 480 volt 1 or 3 phase power supply.

Exterior dimensions: 36" w x 29¾" d x 59½" h on 6" legs.

NSF listed. U L listed. U L listed to Canadian safety standards.

SPECIFY VOLTAGE AND PHASE WHEN ORDERING.

STANDARD FEATURES

- Stainless steel front, sides, back riser, shelf and legs.
- Six 9½" round, 2 KW French plates with infinite heat control switches.
- Full width pull out crumb tray.
- 5 KW oven with top browning control. Thermostat adjusts from 150° to 500°F.
- Cool to the touch control knobs.
- Requires 208V, 240V or 480V, 1 or 3 phase power supply.
- One year limited parts and labor warranty.

OPTIONS

- 11" stainless steel back riser in place of standard back riser and shelf.
- Extra oven rack.
- Set of four casters (two locking).
- 12" x 24" hot top sections, 5 KW input, in place of one French top section. Thermostatically controlled. **NOTE:** Hot top sections increase power consumption and line amp draw. Consult customer service for KW and line amp information when specifying or ordering units with hot tops.
- Choice of 12", 24" or 36" wide, ½" thick griddle plate in place of French plate sections. One thermostat provided for each 12" griddle width. Griddles are supplied on the right side only and add 3" to the overall width of the range. 36" griddle not available in 480 volt.
- Second year extended limited parts and labor warranty.


This appliance is manufactured for commercial installation only and not intended for domestic/household installation.

CLEARANCES FROM COMBUSTABLE CONSTRUCTION:

Range only..... 0" sides, 0" rear

Range and ESB salamander broiler..... 8" sides, 2" rear

Clearance Note: Electric Medium Duty Ranges 0 inches sides and rear from combustible and non-combustible constructions except when hot top sections are incorporated. Ranges incorporating hot top sections are 0 inches sides and rear to non-combustibles and 6" sides and rear to combustible constructions.

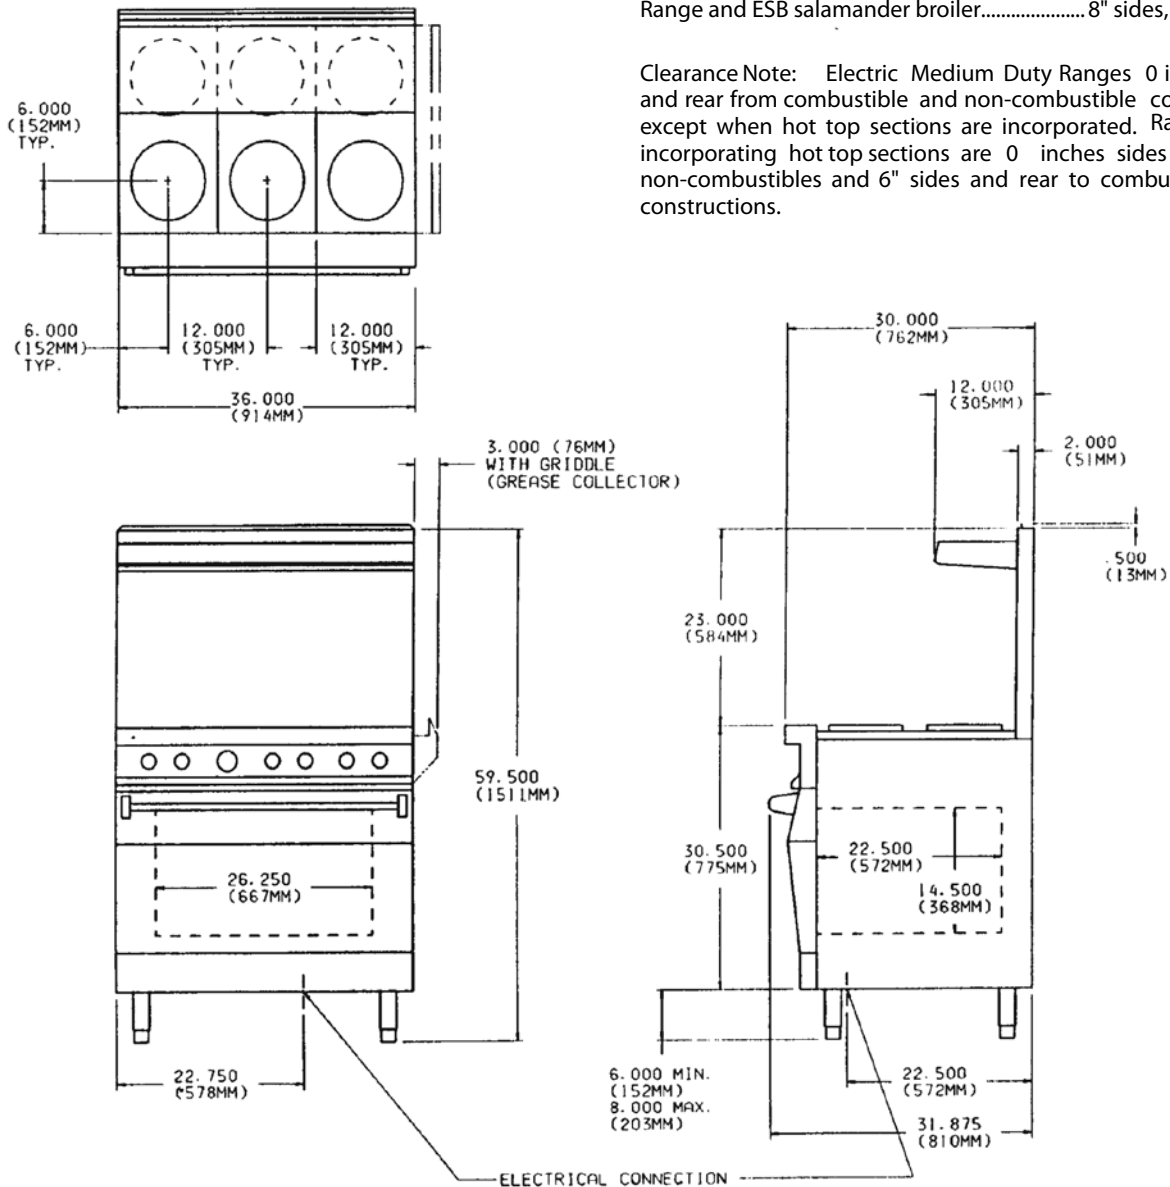

AVAILABLE VOLTAGES - 208 OR 240 VOLT - 1 OR 3 PHASE																
3 PHASE LOADING					NOMINAL AMPS PER LINE WIRE											
MODEL NO.	TOTAL CONN. KW	KW PER PHASE			3 PHASE									1 PHASE		
					208V			240V			480V					
		X-Y	Y-Z	X-Z	X	Y	Z	X	Y	Z	X	Y	Z	208V	240V	480V
E36L	17.0	4.0	8.0	5.0	37.5	50.0	54.1	32.5	43.3	49.9	16.3	21.7	23.5	81.7	70.8	35.4
E36SL	16.4	4.0	7.4	5.0	37.5	47.5	51.6	32.5	41.1	44.7	16.3	20.6	22.4	78.8	68.3	34.2
E36FL	15.8	4.0	6.8	5.0	37.5	45.0	49.1	32.5	39.0	42.6	16.3	19.5	21.3	76.0	65.8	32.9

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.